



REPLACING THE WINCH ROPE

This tutorial explains how to replace the Winch Rope on a Futura Lowering Trailer.


Tools

Number 6 Allen Key

Pliers


Kit

Winch Rope

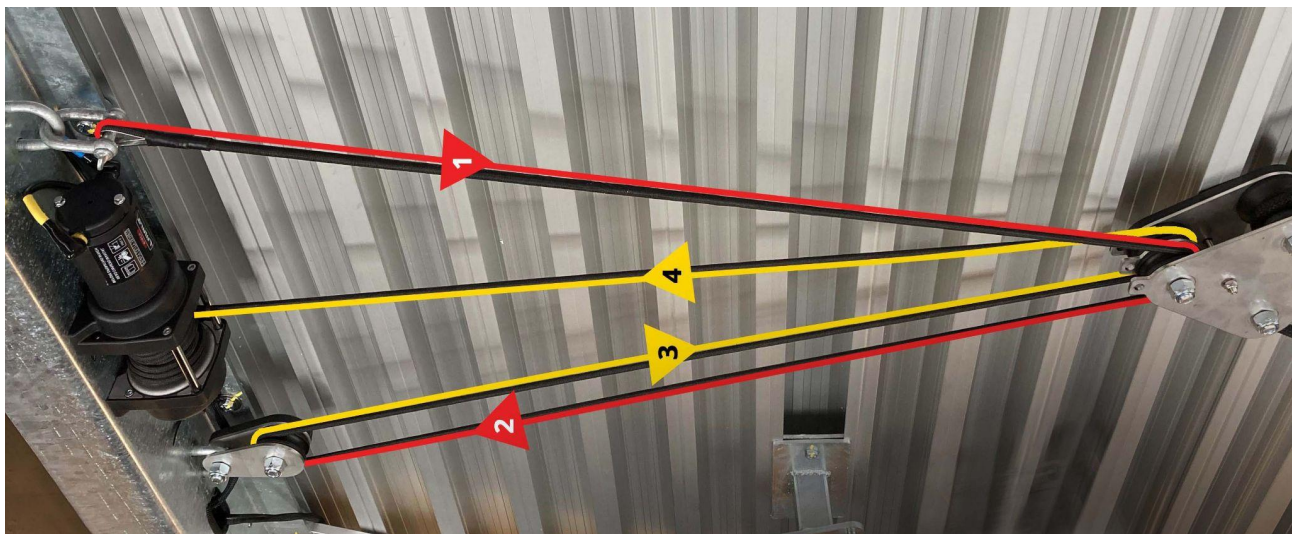

Step 1. From underneath the trailer, start by bolting the eyelet end of the Winch Rope to the shackle located to the right of the Trailer Raising Winch. **IMPORTANT** - secure shackle pin with medium strength thread locker - Loctite or similar.

Step 2. Guide the winch rope through the bottom pulley (furthest from the trailer deck).

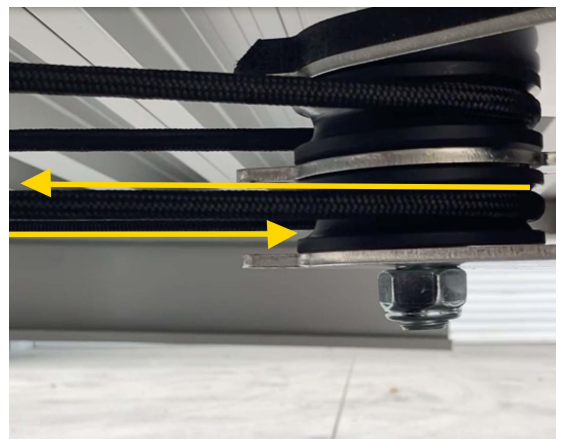



ENSURE : LIFTING ARM ROPES ARE ABOVE AXLE - NO ROPES ARE CROSSED OR TWISTED





ENGINEERED TO BE EFFORTLESS
FUTURATRAILERS.COM




Step 3. Making sure the rope does not cross, guide the Winch Rope back to and through the pulley located to the left of the Trailer Raising Winch.

Step 4. Guide the Winch Rope back to and through the top pulley (closest to the trailer deck).

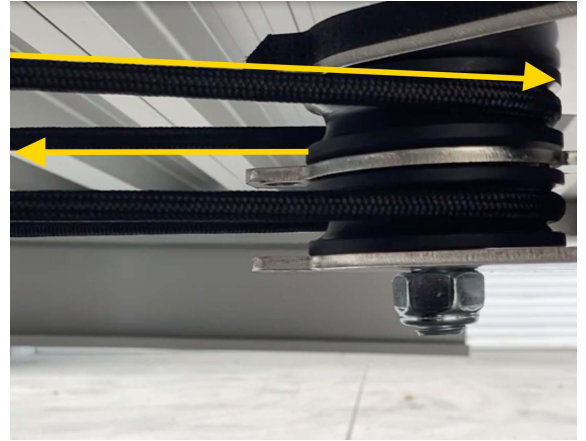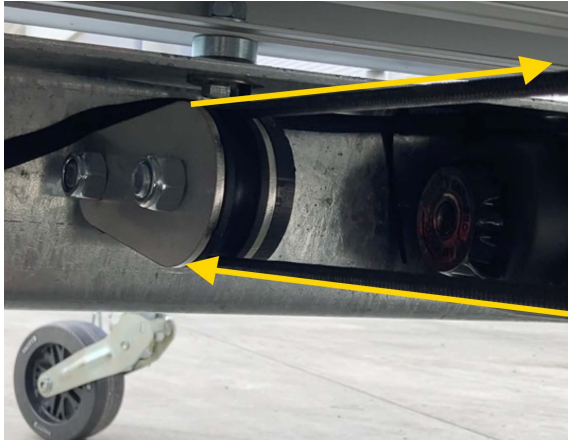

Step 5. Guide the rope back to the Trailer Raising Winch. Push the rope into the hole on the winch drum, so that it is flush with the drum, before securely tightening the set screw.

Step 6. With the rope secured, make sure it has not crossed in any places before operating the trailer in the UP direction. Hold tension on the rope and guide the rope neatly onto the winch drum.

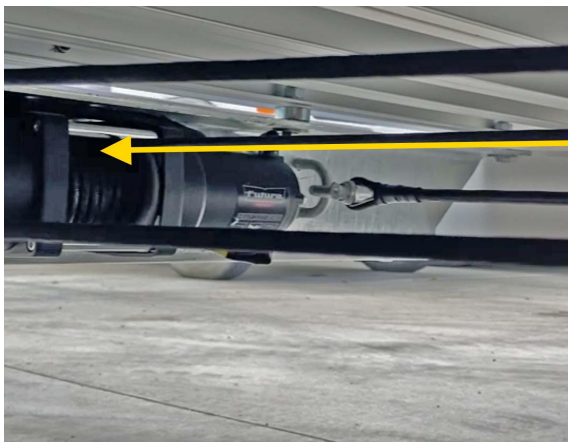

For any questions please do not hesitate to call or email Futura Customer Services.
trailers@futuratrailers.com | PH USA: 855-744-3877 | PH NZ/AUS: +64 9-415-2563



DANGER

Do not work under the trailer when it is loaded. Before working under the trailer ensure the battery switch is off, the safety latches are engaged on all lifting arms and the hitch and rear of the trailer are safely supported.